

Pioneer Dj

DJ Mixer

DJM-V10

Firmware Update Guide

Firmware Update Procedure

Please download the firmware from the Pioneer DJ website and copy it to a USB flash drive for the update.

USB flash drive to be used for the update:

Please use a USB flash drive (Mass Storage Class) with an MBR partition formatted in FAT or FAT32.

Extract the Firmware File

Unzip the downloaded file "DJM-V10_xxx.zip" to find the following file.

DJM-V10_xxx.upd


- ✓ "xxx" is the version of the new firmware.
- ✓ Extension (.upd) might not be shown depending on your computer settings.

Preparations for updating firmware

Copy the firmware file (DJM-V10_xxx.upd) to the root directory of the prepared USB flash drive.

- ✓ Do not change the name of the extracted files.
- ✓ Ensure that only one update file is saved in a USB flash drive when you update the firmware.

Program Update Procedures

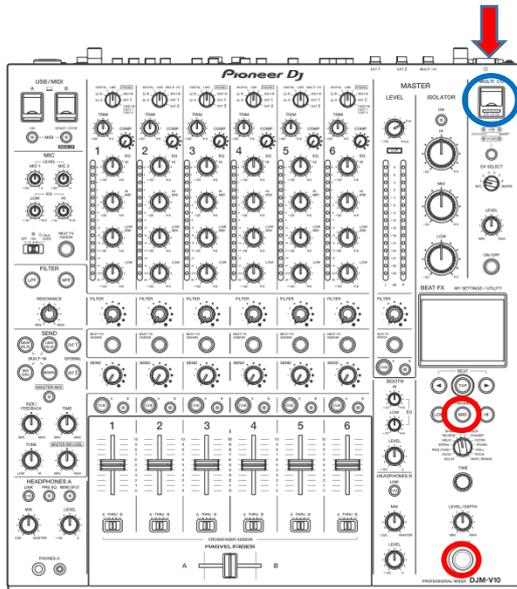

Version
Left: current version
Right: updating version

1. How to enter the Update mode.
Turn on the power while pressing both BEAT FX ON/OFF button and FX FREQUENCY MID button.
2. Check the current version of your firmware on the display.
If current version is displayed as “xxx”, you do not need the update process because it is the latest firmware.
3. Insert the USB flash drive containing the firmware files into the USB port.
The update process will begin and the progress bar and percentage will be displayed on the screen.
 - ✓ Do not turn the power off during the update.
 - ✓ The update will be completed in approximately 5 minutes.
4. When the message [COMPLETE] appears, the update is completed. Please turn the power off and disconnect the USB flash drive.

The update has been completed.

If the update does not begin, please start again from downloading the firmware. Nevertheless, if you cannot update the firmware, replace the USB stick with another one because the USB flash drive could be the cause of the error.

About trademarks and registered trademarks

Pioneer DJ is a trademark of PIONEER CORPORATION and is used under license.

@2025 AlphaTheta Corporation. All rights reserved.

AlphaTheta Corporation

6F, Yokohama i-Mark Place, 4-4-5 Minatomirai, Nishi-ku, Yokohama, Kanagawa 220-0012 Japan